
PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7:		(11) International Publication Number: WO 00/23135	
A61M 16/04, A61B 1/267	A1	(43) International Publication Date: 27 April 2000 (27.04.00)	
(21) International Application Number: PCT/GR (22) International Filing Date: 22 October 1998 (CH, CY, DE, DK, ES, FI, FR, GB, GR, IF, IT, LII, MC		
(30) Priority Data: 980100384 19 October 1998 (19.10.98)	G	Published With international search report. With amended claims.	
(71)(72) Applicants and Inventors: DIMITRIOU, K., [GR/GR]; 9 Chrisippou Street, GR-116 31 Athe VOYAGIS, S., Gregorios [GR/GR]; 19 Kallistrate GR-157 72 Athens (GR).	ns (GR	ı. I	



(57) Abstract

Device for guided tracheal intubation through the intubating laryngeal mask airway to facilitate lung ventilation in unconscious patients, comprising a completely flexible thin tube (1), a bulb of adequate brightness (2) fixed with atoxic glue and silicone (3), a 15—mm concentric adaptor (5), two leads (4) ending in a power connector (6) and an extension (7) ending in a battery (8) with a power switch (9). The device is inserted into the lumen of the tracheal tube (10) in such a way that the bulb protrudes from the distal end of the tracheal tube (10a) and changes the conventional blind technique of tracheal intubation through the intubating laryngeal mask airway, from blind to guided, by using the transillumination of the light through the soft tissues of the human body.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	· SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU		SN	
ÄÜ	Australia	GA	Gabon		Luxembourg		Senegal
AZ	Azerbaijan	GB		LV	Latvia	SZ	Swaziland
BA			United Kingdom	MC	Monaco	m	Chid
	Bosnia and Herzegovina	GE	Georgia	MD.	Republic of Moldova	TG	Togo
BB.	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan .
BE	Belgium	GN	Guinea	- MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Paso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	lreland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of Americ
CA	Canada	ΙT	Italy	MX -	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CC	Congo	KE	Кепув	NL.	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	· NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	K7,	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	. LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
CE	Estonia	LR	Liberia	SG	Singapore		

Title of the invention DEVICE FOR GUIDED TRACHEAL INTUBATION

Field of the Invention

10

15

The present invention relates to a device for guided tracheal intubation without the use of laryngoscope in unconscious patients.

Background of the Invention

The classical method of orotracheal intubation is carried out under direct laryngoscopy [1]. The laryngeal mask airway has a role in the management of difficult airway as an aid to orotracheal intubation and has been widely used in the management of the adult and paediatric difficult airway since 1983 [2-5].

The conventional laryngeal mask airway has been introduced in the anaesthetic practice since 1981 and is commercially available since 1988 [6]. The intubating laryngeal mask airway has been introduced in the anaesthetic practice since 1995 [7]. The intubating laryngeal mask airway is a modification of the conventional laryngeal mask airway and consists of an anatomically curved (90°) short, wide bore, stainless steel tube sheathed in silicone which is bonded to a laryngeal mask airway and a guiding handle [8]. It has a single moveable aperture bar in order to elevate epiglottis, a guiding ramp and can accommodate an 8 mm tracheal tube. The most common technique of orotracheal intubation through the laryngeal mask airway or the intubating laryngeal mask airway is blind, since direct laryngoscopy is not used and the tracheal tube is advanced to trachea blindly through the laryngeal mask airway or the intubating laryngeal mask airway [1,3-5,7-9]. The success rate of blind orotracheal intubation through the conventional laryngeal mask airway is 30-90% [3-5], while through the intubating laryngeal mask airway this is improved to 70-99% [7-9]. The disadvantages of any blind technique are that they may be time consuming, misplacement may result in trauma and there is a risk of accidental oesophageal intubation [8]. It has to be underlined that in the most recent study of the manufacturer of the intubating laryngeal mask airway and his most experienced colleagues, blind orotracheal intubation was succeeded at the first attempt in only 50% (75/150) of

2

patients, whereas 19% (28/150) required one blind adjusting manoeuvre and 30% (46/150) required 2-4 blind adjusting manoeuvres and 3-5 intubating attempts [8]. Each intubating attempt is defined as a forward and backward movement of the tracheal tube through the intubating laryngeal mask airway. As a result of the above blind adjusting manoeuvres is the potential risk of airway trauma, haemodynamic instability as well as hypoxaemia due to delayed airway management.

The lighted stylet has been used to facilitate orotracheal intubation either in the anaesthesia or in the emergency medicine, since the decade of "70s [1,10]. It is consisted of a battery handle and a copper stylet covered in plastic and there is a bulb on the distal end of the stylet. The stylet is inserted into the tube so that the distal bulb protrudes about 0.5 cm from the distal end of the tracheal tube. The tracheal tube and the stylet are then bent to an angle slightly more than 90° and are slid along the tongue to hook up the epiglottis and conduct the glottic opening. The position of the tracheal tube tip can be discerned readily by observing the transillumination of the soft tissues of the neck. A bright glow in the midline at the level of the laryngeal prominence indicates correct placement. Following the correct placement, the stylet is held in place and the tracheal tube is advanced off the stylet distally to the proper depth. Care must be taken not to pull back on the stylet prior to advancing the tracheal tube into the trachea [10]. An improved version of the lighted stylet is the «Trachlight», that also consists of a handle, a metal stylet covered with plastic and a bulb at its distal end [11]. Right and left pyriform fossa misplacement is seen lateral to the midline, while oesophageal misplacement results in a diffuse and subdued light, if any [10,11].

10

20

25

The disadvantages of orotracheal intubation facilitated with lighted stylets are that they may be time consuming and misplacement may result in trauma. The possibility of such misplacements (right lateral, left lateral or oesophageal) is high and consequently there is a potential risk of airway trauma, haemodynamic instability as well as hypoxaemia due to delayed airway management [1,10].

Even the most skilled anaesthesiologists may encounter what is commonly referred to as a «difficult» airway. This occurs in about 5% of all operating room intubations, with an even higher incidence of inability to fully visualize the glottic opening [1,12,13]. The incidence level is significantly higher in other areas of hospital

3

aqnd prehospital environment. Although, presurgical examination of the jaw, teeth, mouth opening and neck motion assists in gauging the degree of difficulty likely to be encountered at intubation, not all difficult intubations can be identified in advance [1,12,13]. There is always the unexpected difficult airway, discovered only at the time of intubation. In emergency situations, there is little if any time to perform an airway assessment prior to attempting intubation. Thus, all emergency tracheal intubations are considered «difficult» intubations. In such circumstances the above referred techniques [1-11] are indicated to been used, but the successful outcome can not be guaranteed and the possibility of serious complications is always present [1].

10

Summary of the Invention

The subject invention is considered as a necessary supplement in the completion of orotracheal intubation through the intubating laryngeal mask airway. The basic principle of the subject invention is the transillumination of the light through the soft tissues of the human body. According to the above basic principle, the main purpose of the subject invention was to attach a bulb at the distal end of the tracheal tube, in order to be indicated, either the tracheal tube position in the laryngopharynx, or the route that the tracheal tube follows during its advancing procedure from the laryngopharynx to the trachea through the intubating laryngeal mask airway. Thereafter, the device of the subject invention changes the conventional technique of intubation, as it is suggested by the manufacturer of intubating laryngeal mask airway [7,8], from blind to guided.

The aims of the subject invention are: (a) decreased number of adjusting manoeuvres in the procedure of modified orotracheal intubation through the intubating laryngeal mask airway, (b) decreased number of failed attempts of advancing the tracheal tube to the trachea, (c) decreased overall duration of the procedure of intubation through the intubating laryngeal mask airway, (d) decreased risk of trauma in laryngopharynx, (e) decreased haemodynamic impact of the orotracheal intubation (cardiovascular instability: arterial hypertension, tachycardia, arrythmias), (f) ease in learning and training orotracheal intubation through the intubating laryngeal mask airway by all non-anaesthetic personnel involved in airway management following a

4

short training program and (g) effective and fast orotracheal intubation, even in cases of difficult airway, whenever other conventional techniques either under direct laryngoscopy, or blindly through the intubating laryngeal mask airway have failed.

In one embodiment the subject invention, should be manufactured for single patient use thereby eliminating the requirement for cleaning, and most importantly eliminating the opportunity for cross contamination between patients. In a specific embodiment the subject invention can be disposable, sterilizable for reuse or enclosed within a disposable sheath for reuse without expensive sterilization.

Brief Description of the Drawings

10

FIGURE 1 shows the device of the subject invention.

FIGURE 2 shows the device of the subject invention after its placement in the lumen of the tracheal tube.

FIGURE 3 illustrates an intubating laryngeal mask airway in use in a patient; the device of the subject invention with the tracheal tube has been advanced in the lumen of intubating laryngeal mask airway; the distal end of the tracheal tube protrudes from the bowl of intubating laryngeal mask airway; the bulb of the subject invention is turned on; and the bright glow is transilluminated to the neck.

Detailed Disclosure of the Invention

The subject invention utilizes the transillumination of the light through the soft tissues of the human body as a guide for the successful insertion of the tracheal tube from the laryngopharynx to the trachea. The device of the subject invention can assist doctors and all non-anaesthetic personnel involved in airway management in properly introducing and confirming the position of the tracheal tube in the procedure of tracheal intubation without the usage of laryngoscopes, since the direct laryngoscopy is not necessary. Although, the device has application in «difficult» intubations, use in all intubations is suggested in the everyday practice. The device of the subject invention has application for intubating patients undergoing general, intravenous and local anaesthesia and in emergency situations. Thus, the device of the subject invention

5

can be used in surgical procedures as well as in intensive care units, emergency departments and the prehospital settings.

The subject invention incorporates aspects of both the blind technique used by intubating laryngeal mask airway and the guided technique that uses the indirect transcutaneous illumination of the trachea. The former achieves the placement of the tracheal tube up to the laryngopharynx and the latter achieves a quick and safe advancing of the tracheal tube from the laryngopharynx to the trachea.

Referring to Figures 1 and 2, the device of the subject invention consists of a thin plastic tube 1, which at its distal end comprises a bulb 2 of adequate brightness fixed with atoxic glue and silicone 3. Two leads 4 are running along the lumen of the thin plastic tube 1, ending in a power connector 6 and an extension 7 is starting from the power connector 6 ending in a battery 8 with a power switch 9. At the proximal end of the thin plastic tube 1, there is a 15-mm concentric adaptor 5 where the tracheal tube 10 is immobilized. The tracheal tube 10 is suggested to be flexible with reinforced wall, in order to avoid kinking. The maximum length of the thin plastic tube 1 may be up to 35 cm, while the maximum outer diameter may be up to 5 mm. The thin plastic tube 1 is flexible without any metallic component. In one embodiment the thin flexible tube 1 of the subject invention, should be manufactured, either from plastic, or from other materials (e.g. papier mâché) for single patient use thereby eliminating the requirement for cleaning and most importantly eliminating the opportunity for cross contamination between patients. In a second embodiment the thin flexible tube 1 should be armoured (spiral) with reinforced wall, avoiding kinking. In a specific embodiment the thin flexible tube 1 of the subject invention can be disposable, sterilizable for reuse or enclosed within a disposable sheath with a transparent end plate for reuse without expensive sterilization.

15

20

30

Referring to Figure 2, the device of the subject invention has been placed into the lumen of the tracheal tube 10 in such a way that the bulb 2 protrudes from the distal end of the tracheal tube 10a in a distance of 0.5 cm. Additionally, the figure 2 shows the fixing mechanism of the tracheal tube connector 10b to the adaptor 5 of the subject invention. The concentric adaptor 5 has a changeable fixing point, in order to be adjusted to the proper length of the tracheal tube 10, which is every time chosen.

Referring to Figure 3, the intubating laryngeal mask airway has been placed in the laryngopharynx of the patient. The anaesthesiologist 1 advances the tracheal tube 2 with the device of the subject invention in the metallic lumen 3 of the intubating laryngeal mask airway. When the distal end of the tracheal tube 4 protrudes into the bowl 5 of the intubating laryngeal mask airway about 2 cm, the bulb 6 is at the glottic opening. Then, the position of the tracheal tube tip can be discerned readily by observing the transillumination of the glow 7 to the soft tissues of the neck. A bright glow in the midline at the level of the laryngeal prominence indicates correct placement. In that case, the tracheal tube is advanced into the trachea and the device of the subject invention is pulled back. Right or left lateral glow indicates misplacement of the tracheal tube in the pyriform fossa, while oesophageal misplacement results in a diffuse and subdued light, if any. In these cases, by the aid of the handle of the intubating laryngeal mask airway 8, adjusting manouevres are carried out in order to achieve a redirection of the glow in the right position in the midline at the level of the laryngeal prominence.

The flexibility of the device of the subject invention facilitates its advancing in the lumen of the tracheal tube. Moreover, the device of the subject invention does not impede the insertion of the tracheal tube either in the curved (90°), stainless steel lumen of intubating laryngeal mask airway, or in the trachea. The latter means that after the identification of the glow in the midline at the level of the laryngeal prominence, the tracheal tube is inserted freely without any resistance.

20

10

References

- 1 Latto IP, Vaughan RS. Difficulties in tracheal intubation. Edited by W.B. Saunders Co Ltd, London, 1997.
- 2 Brain AI. Three cases of difficult intubation overcome by the laryngeal mask airway. Anaesthesia 1985; 40: 353-355.
 - 3 Heath ML, Allagain J. Intubation through the laryngeal mask. A technique for unexpected difficult intubation. Anaesthesia 1991; 46: 545-548.
- Voyagis GS, Photakis D, Kellari A, Kostanti E, Kaklis S, Secha-Dousaitou PN, Tsakiropoulou-Alexiou H. The laryngeal mask airway: A survey of its usage in 1096 patients. Min Anestesiol 1996; 62: 277-280.
- 5 Brimacombe JR, Brain AlJ. Difficult airway. In: The laryngeal mask airway. A review and practical guide. Edited by W.B. Saunders Co Ltd, London, pp. 178-199, 1997.
- Brimacombe JR, Brain AIJ. Introduction; History. In: The laryngeal mask
 airway. A review and practical guide. Edited by W.B. Saunders Co Ltd,
 London, pp. 1-9, 1997.
 - 7 Kapila A, Addy EV, Verghese C, Brain AIJ. Intubating laryngeal mask airway: a preliminary assessment of performance. Br J Anaesth 1995; 75: 228P-229P.
- Brain AIJ, Verghese C, Addy EV, Kapila A, Brimacombe J. The intubating laryngeal mask II: A preliminary clinical report of a new means of intubating the trachea. Br J Anaesth 1997; 79: 704-709.
 - 9 Palgimesi N, Bairaktari A. Intubating laryngeal mask airway (Fastrach): the learning curve of its use. Br J Anaesth 1998; 80: A81.
- Volmer TP, Stewart RD, Paris PM, Ellis D, Berkebile PE. Use of a lighted stylet for guided orotracheal intubation in the prehospital setting.
 Ann Emerg Med 1985; 14: 324-328.
 - Hung OR, Stewart RD. Lightwand intubation I. A new intubating device. Can J Anaesth 1995; 42: 820-825.
- 30 12 Voyagis GS, Kyriakis KP. The effect of goiter on endotracheal intubation. Anesth Analg 1997; 84: 611-612.

- Voyagis GS, Kyriakis KP, Dimitriou V, Vrettou I. Value of oropharyngeal Mallampati classification in predicting difficult laryngoscopy among obese patients. Eur J Anaesth 1998; 15: 330-334.
- Multicentre study. The use of the laryngeal mask airway by nurses during cardiopulmonary rescuscitation. Anaesthesia 1994; 49: 3-7.
- Brimacombe JR, Brain AIJ. Training and basic uses. In: The laryngeal mask airway. A review and practical guide. Edited by W.B. Saunders Co Ltd, London, pp. 134-136, 1997.

10

5

15

20

25

CLAIMS:

- 1. Device for guided tracheal intubation through the intubating laryngeal mask airway to facilitate lung ventilation in unconscious patients, comprising a completely flexible thin tube and a bulb of adequate brightness attached to the distal end of the thin tube, a 15-mm concentric adaptor at the proximal end of the thin tube, two leads running along the lumen of the thin tube ending in a power connector and an extension starting from the power connector ending in a battery with a power switch.
- 2. Device for guided tracheal intubation through the intubating laryngeal mask airway as claimed in claim 1, wherein the thin tube is plastic and completely flexible without any metallic component, with maximum length up to 35 cm and maximum outer diameter up to 5 mm.
- 15 3. Device for guided tracheal intubation through the intubating laryngeal mask airway as claimed in claim 1, wherein the bulb is fixed at the distal end of the thin plastic tube with atoxic glue and silicone.
- 4. Device for guided tracheal intubation through the intubating laryngeal mask 20 airway as claimed in claim 1, wherein the concentric 15-mm adaptor has a changeable fixing point, in order to be adjusted to the proper length of the tracheal tube, which is every time chosen.
 - 5. Device for guided tracheal intubation through the intubating laryngeal mask airway as claimed in any preceding claim, which is placed into the humen of the tracheal tube in such a way that the bulb protrudes from the distal end of the tracheal tube in a distance of approximately 0.5 cm.

- 6. Device for guided tracheal intubation through the intubating laryngeal mask airway as claimed in claim 5, which is placed into the lumen of the tracheal tube, in order to change the conventional blind technique of orotracheal intubation, from blind to guided, by using the transillumination of the light through the soft tissues of the human body.
- 7. Device for guided tracheal intubation as claimed in claim 2, wherein the thin plastic tube is disposable, sterilizable for reuse.
- 10 8. Device for guided tracheal intubation as claimed in claim 2, wherein the thin plastic tube further comprises a disposable sheath with a transparent end plate within which said thin plastic tube is inserted during use.
- 9. Device for guided tracheal intubation as claimed in claim 1, wherein the thin flexible tube should be manufactured from papier mâché or other flexible material.
 - 10. Device for guided tracheal intubation as claimed in claim 1, wherein the thin flexible tube should have reinforced (spiral) wall, avoiding kinking.

20

AMENDED CLAIMS

[received by the International Bureau on 12 October 1999 (12.10.99); original claims 11,12 and 13 added; remaining claims unchanged (2 pages)]

- order to change the conventional blind technique of orotracheal intubation, from blind to guided, by using the transillumination of the light through the soft tissues of the human body.
- Device for guided tracheal intubation as claimed in claim 2, wherein the thin plastic tube is disposable, sterilizable for reuse.
 - 8. Device for guided tracheal intribation as claimed in claim 2, wherein the thin plastic tube further comprises a disposable sheath with a transparent end plate within which said thin plastic tube is inserted during use.

15

- 9. Device for guided tracheal intubation as claimed in claim 1, wherein the thin flexible tube should be manufactured from papier mâché or other flexible material.
- 10. Device for guided tracheal intubation as claimed in claim 1, wherein the thin flexible tube should have reinforced (spiral) wall, avoiding kinking.
 - 11. Device for guided tracheal intubation through the intubating laryngeal mask as claimed in claim 1, wherein the power connector is connected to the power source without the extension.

25

12. Device for guided tracheal intubation through the intubating laryngeal mask as claimed in claims 1 and 2, wherein the 15-mm concentric adaptor is removed, the two leads at the proximal end of the thin flexible tube are connected immediately to a power source and the thin flexible tube is running longitudinally into a small channel into the wall of a flexible tracheal tube, ending at the distal end of the tracheal tube, with reference to figure 3.

Device for guided tracheal intubation through the intubating laryngeal mask as 13. claimed in claim 12, wherein the small channel is located along the outer wall of a flexible tracheal tube, ending at the distal end of the tracheal tube, with reference to

figure 4.

5

- 10

15

20

25

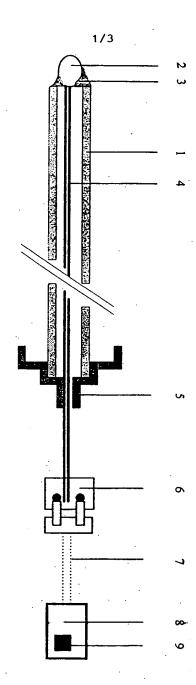


Fig 1.


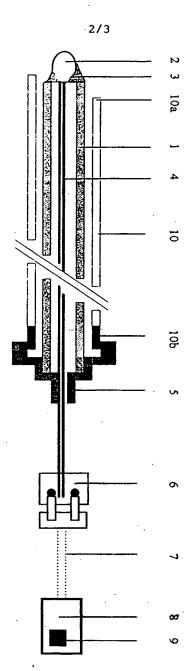


Fig 2



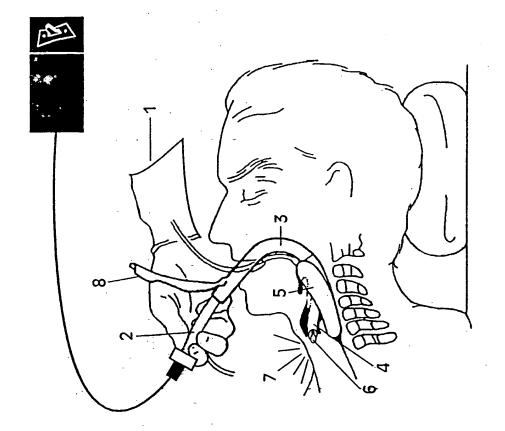

INTERNATIONAL SEARCH REPORT

Intri Tional Application No PCT/GR 98/00026

TA CLASS	FICATION OF SUBJECT MATTER			
ÎPC 7	A61M16/04 A61B1/267			
A	https://www.co.diffcon.co.Chinatica.co.co.co.co.co.co.co.co.co.co.co.co.co.			
	o International Patent Classification (IPC) or to both national classific	ation and IPC		
	SEARCHED			
IPC 7	ocumentation searched (classification system tollowed by classification A61M A61B	on symbols)		
Documenta	tion searched other than minimum documentation to the extent that a	such documents are included in the fields se	erched	
Electronic d	ata base consulted during the international search (name of data be	se and, where practical, search terms used)	
	-	• •		
C. DOCUM	ENTS CONSIDERED TO BE RELEVANT			
Category *	Citation of document, with Indication, where appropriate, of the rele	evant passages	Relevant to claim No.	
Υ	DE 12 11 360 B (DR ABDUL HAYEE SA	NEED)	1,2,4-10	
	24 February 1966 (1966-02-24)			
	column 3, line 12 - line 60; fig	jures		
Υ	US 3 760 797 A (STAUFFER V)	·	1,2,4-10	
	25 September 1973 (1973-09-25)		-,-, -	
	column 2, line 4 - line 8; figur	es	ì	
	column 2, line 53 - column 5, li	ne 13		
A	WO 95 33506 A (BRAIN ARCHIBALD IA	IN JEREMY)	1	
	14 December 1995 (1995-12-14)			
	page 7, line 15 - page 9, line 1 figures	1;	·	
A	GB 2 289 420 A (BULLARD JAMES ROG	iER)	1	
	22 November 1995 (1995-11-22) page 7, line 8 - page 10, line 3	13.		
	figures 1-6	,,,		
				
Furth	ner documents are listed in the continuation of box C.	γ Patent family members are listed in	n annex.	
* Special car	tegories of cited documents :	"T" later document published after the Inter	national filing date	
	ent delining the general state of the art which is not ered to be of particular relevance	or priority date and not in conflict with to cited to understand the principle or the		
"E" earlier d	"E" earlier document but published on or after the international filter date "X" document of particular relevance; the claimed invention			
1. document which may throw doubts on priority claim(s) or involve an inventive step when the document is taken alone which is cited to establish the publication date of another			rument is taken alone	
citation	or other special reason (as specified) and referring to an oral disclosure, use, exhibition or	"Y" document of particular relevance; the cl cannot be considered to involve an inv document is combined with one or mo	entive step when the	
other n		ments, such combination being obviou in the art.	s to a person skilled	
		"&" document member of the same patent i	amily	
Date of the a	actual completion of the international search	Date of mailing of the international sea	rch report	
. 29	9 July 1999	09/08/1999		
Name and m	nailing address of the ISA	Authorized officer	· · · · · · · · · · · · · · · · · · ·	
	European Patent Office, P.B. 5818 Patentiaan 2 NL - 2280 HV Rijswijk			
	Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Zeinstra, H		
		Zeinstra, H		
	•	l		

INTERNATIONAL SEARCH REPORT

information on patent family members

Int tional Application No PCT/GR 98/00026

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 1211360	В		NONE	
US 3760797	Α	25-09-1973	NONE	
WO 9533506	A	14-12-1995	AU 691299 B	14-05-1998
			AU 2624995 A	04-01-1996
			CA 2191749 A	14-12-1995
			CN 1149837 A	14-05-1997
			EP 0768903 A	23-04-1997
			IL 114005 A	12-03-1999
			JP 10504733 T	12-05-1998
			ZA 9504619 A	26-01-1996
GB 2289420	A	22-11-1995	US 5551946 A	03-09-1996
			DE 19518148 A	23-11-1995
			US 5665052 A	09-09-1997
			US 5842973 A	01-12-1998

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

BLACK BORDERS

IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

FADED TEXT OR DRAWING

BLURRED OR ILLEGIBLE TEXT OR DRAWING

SKEWED/SLANTED IMAGES

COLOR OR BLACK AND WHITE PHOTOGRAPHS

GRAY SCALE DOCUMENTS

LINES OR MARKS ON ORIGINAL DOCUMENT

REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

IMAGES ARE BEST AVAILABLE COPY.

OTHER:

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.